


## Revolabs Hybrid HD Microphones and Hybrid XLR Adapter


Installing the Revolabs Hybrid HD Microphone or XLR Adapter is easy. Simply plug the power supply into a power outlet, connect it to the hybrid power adapter, and plug the microphone into the power adapter. The Hybrid Microphone or XLR Adapter will power on and be ready for use. Hybrid Microphones and XLR Adapters are always active and charging while in the power adapter. After roughly 2 hours in the charger the microphone battery will have a full charge. At that time the microphone can be removed from the power adapter as required.

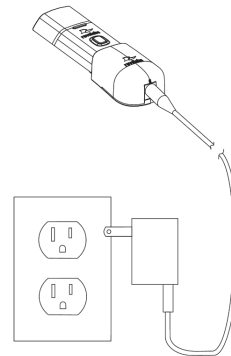

### Permanently installing the Hybrid Microphones

Use the provided wipe to clean the bottom of the hybrid microphone power adapter. When dry, attach the provided tape to the bottom.

Clean the surface on which you want to place the hybrid microphone with approved cleaning material. Place the microphone in the power adapter before removing the protective cover from the tape and attaching it to the surface. Provide slight pressure to the power adapter for about 60 seconds to ensure the tape connects with the underlying surface. Hold the charger securely while attaching the power cord. Let the adhesive cure for 24 hours before taking the microphone out of the charger.



### Pairing Hybrid Microphones

To pair the hybrid microphone to the HD receiver, you will need to turn off the microphone. To turn off the microphone or XLR adapter, take it out of the power adapter and then hold down the multi function button until the LED on the microphone turns constant red. Release the button—the microphone is now turned off.

Once the microphone is turned off, press the multi function button and hold it down until the LED turns constant red. The microphone is now in pairing mode. Bring the HD receiver into pairing mode as well. Once the microphone and the receiver are paired, the microphone LED will either blink green (unmuted) or red (muted).